



SATRONICS WALL SPEAKERS



HYB125-6C

WALL SPEAKER BLACK

Load rating: 40W

8 ohm speaker

Frequency range:70Hz-20KHz

SPL (@ 1W/m) : 91dB

Woofer and Impedance: 6 1/2 " PP / 8 ohms

Tweeter and Impedance: 1" silk dome / 8ohms

With cross over

Dimension HxWxD(mm): 308 X 213 X 191mm

Material : PP



HYB106 - 8 Ohm 30WATT , BLACK

**HYB106-5T - 100V LINE 30 WATT / 8 OHM , WHITE
WALL SPEAKER**

With 100V Matching transformer and 8ohms

Load rating: 30W

Transformer tapings:30-15-7.5W(100V)/30-15-7.5-3.75W(70V)

Frequency range:90Hz-20KHz

SPL(@1W/m):89dB

Woofer and Impedance:5 1/4"PP/8 ohms

Tweeter and Impedance:3/4" silk dome/8ohms

Dimension HxWxD(mm): 248X183X164mm

Material : PP



HYB105 - 8 Ohm , 10 WATT HYB105T - 100V LINE , 10 WATT

WALL SPEAKER BOX

1 PAIR WITH MOUNTING BRACKETS

Frequency range:100Hz -20KHz

SPL(@1W/m):87dB

Woofer and Impedance:4"cone/8 ohms

Tweeter and Impedance:2" dome/8ohms

Dimension HxWxD(mm): 208X140X120mm

Material , Colour: PP, White or black



HWR107T

Line Voltage: 100V

RMS Power: 3/6/10W

Transformer:3/6/10W

Speaker unit:6.5" x1 + 1.5" x1

Response Frequency: 150Hz-15KHz

Sensitivity(1m/1w):91dB

Dimension: 200x105x275mm

Case material: ABS

Weight: Approx.:1.4kg

Input connection:4 poles press connector

Meas/ QTY:59x43x30cm/10pcs



HWR101 - 8 OHM 10W

HWR101T - 100V LINE 10 WATT

WALL SPEAKER

Line Voltage: 100V

RMS Power: 10W

Transformer: 10W

Speaker unit: 6.5" x1

Response Frequency: 150Hz-15KHz

Sensitivity(1m/1w):91dB


Dimension: 180x80x220mm

Case material: ABS

Weight: Approx.:1.1kg

Input connection: 2 poles press connector

Meas/ QTY: 48x40x25cm/10pcs

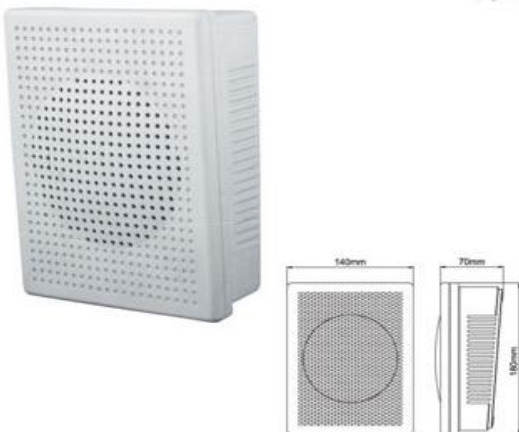

HWR110T

Line Voltage: 100V

RMS Power: 10W

Transformer: 10W

Speaker unit: 5" x1

Response Frequency: 80Hz-14KHz

Sensitivity(1m/1w):91dB

Dimension: 140x70x180mm

Case material: ABS

Weight: Approx.:1.1kg

Input connection: 2 poles press connector

Meas/ QTY: 61x39x40cm/10pcs

HSR312-6T

Projection speaker

20 watts RMS power /100V line

20 / 10 / 5/ 2.5 watt tapings

6" woofer

Sensitivity: 92dB/1W, 1m

Frequency range: 110HZ~15kHz

Wall mounting or hanging

Moisture resistant

White ABS housing

Dimension: Ø 170 x 245mm

