



START
with quality products .
AUDIO



PUBLIC ADDRESS AMPLIFIER

MP3 PLAYER

ST2350 - 350 WATT RMS

CHIME OUTPUT

SHORT CCT & OVERLOAD PROTECTION

TURN ON DELAY ,

OVER HEAT PROTECTION

POWER SUPPLY : 250V AC 50Hz

OUTPUT : 1X AUX , 100V , 70V , 4-16Ohm .

INPUT : 3X AUX . 3X MIC

MIC 1 - PRIORITY WITH MUTE FUNCTION

FREQUENCY RESPONSE : 80Hz TO 16KHz +- 2db

DISTORTION: : < 0.5% @ 1KHz

MUTE ATTENUATION : 0 - 30 dB

LED INDICATORS - POWER , FAULT & SIGNAL LEVEL



PUBLIC ADDRESS AMPLIFIER

MP3 PLAYER & FM RADIO with remote control

ST2250 - 250 WATT RMS

CHIME OUTPUT

SHORT CCT & OVERLOAD PROTECTION

TURN ON DELAY ,

OVER HEAT PROTECTION

POWER SUPPLY : 250V AC 50Hz

OUTPUT : 1X AUX , 100V , 70V , 4-16Ohm .

INPUT : 3X AUX . 3X MIC

TREBLE , BASS & MAIN VOLUME CONTROLS

MIC 1 - PRIORITY WITH MUTE FUNCTION

FREQUENCY RESPONSE : 80Hz TO 16KHz +- 2db

DISTORTION: : < 0.5% @ 1KHz

MUTE ATTENUATION : 0 - 30 dB

LED INDICATORS - POWER , FAULT & SIGNAL LEVEL



SE2120

PUBLIC ADDRESS AMPLIFIER

120 WATT RMS , 200 WATT PEAK

INPUT : 3X AUX . 3X MIC

OUTPUT : 1X AUX , 100V , 70V , 4-16Ohm .

TREBLE , BASS & MAIN VOLUME CONTROLS

MIC 1 - PRIORITY WITH MUTE FUNCTION

FREQUENCY RESPONSE : 80Hz TO 16KHz +- 2db

DISTORTION: : < 0.5% @ 1KHz

MUTE ATTENUATION : 0 - 30 dB

LED INDICATORS - POWER , FAULT & SIGNAL LEVEL

SHORT CCT & OVERLOAD PROTECTION


TURN ON DELAY

OVER HEAT PROTECTION

POWER SUPPLY : 250V AC 50Hz



START
with quality products .
AUDIO

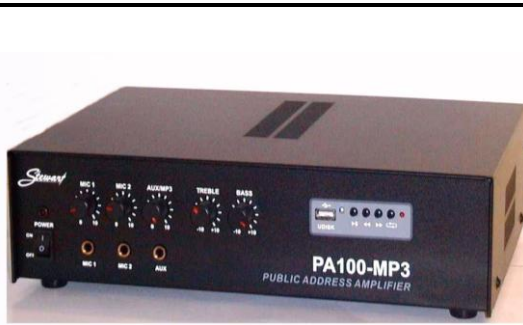

PA100U

PUBLIC ADDRESS AMPLIFIER

MP3 PLAYER , USB MEMORY STICK INPUT

MP3 LEVEL CONTROL , PLAY , REVERSE , FORWARD

60 WATT RMS , 100 WATT PEAK

INPUT : 2 X MICROPHONE

MP3 OR AUX INPUT

>3% DISTORTION @ 40WATT

TREBLE & BASS CONTROLS

4 - 16 OHM & 70V , 100V LINE OUTPUT

SUPPLY VOLTAGE : 12V D 1 X AUX



PA450B-MP3

PUBLIC ADDRESS AMPLIFIER

OUTPUT : 4 - 16 OHM & 70V , 100V LINE OUTPUT

MP3 PLAYER , USB MEMORY STICK INPUT

MP3 LEVEL CONTROL , PLAY , REVERSE , FORWARD

45WATT PEAK OUTPUT 15WATT RMS OUTPUT

>3% DISTORTION @ 15WATT

2 X MICROPHONE INPUT SOCKETS

1 X AUX INPUT SOCKET

12V DC OR 220-250 V AC 50Hz



PA301

PUBLIC ADDRESS AMPLIFIER

45WATT PEAK OUTPUT 20WATT RMS OUTPUT

>3% DISTORTION @ 15WATT

4 - 16 OHM OUTPUT IMPEDANCE

2 X MICROPHONE INPUT SOCKETS

1 X AUX INPUT SOCKET

240V AC / 12V DC



PA301/M

PUBLIC ADDRESS AMPLIFIER

OUTPUT : 4 - 16 OHM

MP3 PLAYER , USB MEMORY STICK INPUT

POWER : 25 WATT RMS , 45W MAX

MP3 PLAY , REVERSE , FORWARD BUTTONS

2 X MIC AND 1X AUX / MP3 VOLUME CONTROL

2 X MICROPHONE AND 1X AUX INPUT SOCKETS

FREQUENCY RESPONSE : 50 Hz TO 20 KHz

>3% DISTORTION @ 15WATT

12V DC OR 220-250 V AC 50Hz

DIMENSIONS : 19 X 20 X 7 cm

QTY / CARTON : 6